



Temperature converter CLA-TC-x

CLA-TC-x



- Dedicated input for J or K thermocouple
- Analog output 4-20mA
- Linearity 0,1%

Converter CLA-TC-x changes temperature signal from thermocouple sensor to analog signal in 4-20mA standard. The converter is in case mounted on a industry standard DIN rail.


Measuring ranges

Model	Range
CLA-TC-J	0 ÷ 400 °C
CLA-TC-K	0 ÷ 400 °C

Specifications

input signal	J or K type thermocouple
output	4-20mA
output resolution	16 bits
accuracy of the calibration	± 0,1 %
linearity	± 0,1 %
power supply	10÷36V
work temperature	0 ÷ 50°C

Size

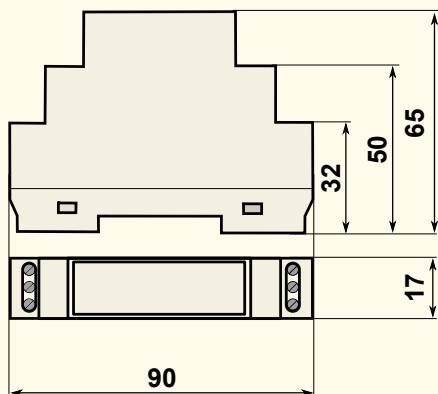

Wiring diagram

